



GROUT PUMP

Features


- Suitable for a variety of viscosities.
- Steel mesh hinged safety cover.
- Fully enclosed drive system.
- Chain or belt driven.
- Solid or pneumatic front wheels.
- Rear castor wheels or stands.
- Removable panels for easy maintenance.
- Adjustable chain/belt tension.
- Four lifting points.

Note: Not suitable for abrasive mixtures.

Specifications

Capacity: 8-12 20kg Bags
 Power: 1P (240V) or 3P (415V)
 Flow: 2415 L/hr (max)
 Pressure: 552 kPa (max)
 Finish: Equipment enamel paint - IHS Blue
 Dimensions: 1191mm x 826mm x 1159mm
 Weight: 195kg

Ordering Information

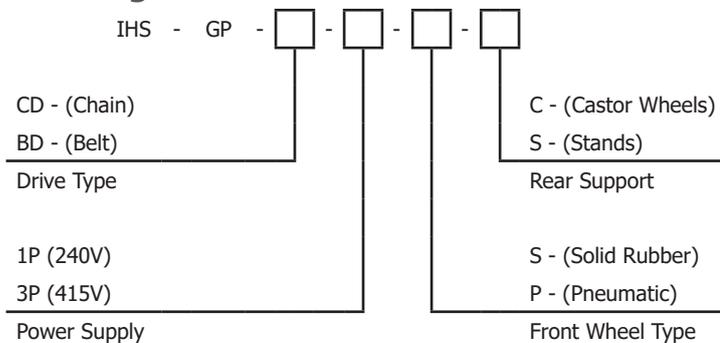

Accessories

| Part No. | Description |
|-----------|-------------------|
| IHS-GP-DH | 30m Delivery Hose |
| IHS-GP-DN | Delivery Nozzle |
| IHS-GP-PG | Pressure Gauge |

Spares

| Part No. | Description |
|-----------|-----------------|
| IHS-GP-ST | Stator (Rubber) |
| IHS-GP-R | Rotor (Worm) |
| IHS-GP-C | Chain |
| IHS-GP-B | Belt |
| IHS-GP-BV | Ball Valve |